



European Brand

Smart LT30 Track Light System

Ultra Slim, Modern Aesthetics



Tunable white



Dimming Brightness

Ultra Slim



thickness

24V

Low Voltage



*Bluetooth
Direct Connection*



CRI ≥ 90





Smart LT30

Track Light System

Features :

• **Ultra Slim, Modern Aesthetics**

The LT30 series features an ultra slim aluminum track, thickness down to 5.5mm, perfectly blending into the ceiling. Minimalism aesthetics, excellent fit for modern decoration.

• **Bluetooth Direct Connection**

The LT30 series supports direct Bluetooth connection, no requirement for extra gateway. Convenient setup in Simon Smart APP and Simpadd.

• **Various lights, Separate Control**

The LT30 series offers various lighting modules: spotlight, grid spotlight, adjustable grid spotlight, linear light, and 2 power options for each model.

All modules can be controlled individually to adjust brightness and color temperature.

• **Two Control Methods**

The direct Bluetooth linkage makes it possible to easily control LT30 in both Simon Smart APP and Simpadd.

• **Easy Installation**

The LT30 series provides both surface mounting and recessed tracks to satisfy different user preferences. Both promises effortless installation.

• **Smart/Non-smart Versions Available**

Smart LT30 offers more flexibility for brightness and color temperature adjustment, while the conventional non-smart version settles down to the fundamentals of lighting.

Application :




Certification :



Support multiple smart control ways



1. Simpadd S00E0-S026



Download the app in:



Google Play







App store

Specification







DC 24V	<i>Traditional / Smart</i>	CCT 2700K-6500K	BLE 5.0	Stepless Dimming	CRI 90	INSTR Recessed Surface	Finishing Black	Lifetime 30000h
-------------------	--------------------------------	----------------------------	--------------------	-----------------------------	-------------------	---------------------------------------	----------------------------	----------------------------

Order Code	English Description	Nominal Power	Color Temperature	Luminous Flux (lm)	Product Size (mm)
N64E0-0019	Smart LT30 24V TunableWH TRK Linear Light 10W BK	10W	TunableWH	700lm	L412*W20*H12mm
N64E0-0020	Smart LT30 24V TunableWH TRK Linear Light 18W BK	18W	TunableWH	1260lm	L614*W20*H12mm
N64E0-0021	Smart LT30 24V TunableWH TRK GridSpotlight 10W28°BK	10W	TunableWH	700lm	L412*W20*H12mm
N64E0-0022	Smart LT30 24V TunableWH TRK GridSpotlight 18W28°BK	18W	TunableWH	1260lm	L614*W20*H12mm
N64E0-0023	Smart LT30 24V TunableWH TRK Adjust GridSpotlight10W28°BK	10W	TunableWH	700lm	L222.3*W20*H36.4mm
N64E0-0024	Smart LT30 24V TunableWH TRK Spotlight 6W24°BK	6W	TunableWH	420lm	Φ35*L195.4*H123mm
N64E0-0025	Smart LT30 24V TunableWH TRK Spotlight 6W36°BK	6W	TunableWH	420lm	Φ35*L195.4*H123mm
N65E0-0020	LT30 24V constant voltage Driver100W	100W	-	-	-
N66E0-0039	LT30 Surface Mount Track 0.5meter BK	-	-	-	-
N66E0-0040	LT30 Surface Mount Track 1.5meter BK	-	-	-	-
N66E0-0043	LT30 I shape Power connector BK Surface	-	-	-	-
N66E0-0044	LT30 L corner acc_Horizontal BK Surface	-	-	-	-
N66E0-0045	LT30 T shape acc BK Surface	-	-	-	-
N66E0-0046	LT30 L corner acc_Vertical BK Surface	-	-	-	-
N66E0-0041	T30 Recessed Track 0.5meter BK	-	-	-	-
N66E0-0042	LT30 Recessed Track 1.5meter BK	-	-	-	-
N66E0-0047	LT30 I shape Power connector BK Recessed	-	-	-	-
N66E0-0048	LT30 L corner acc_Horizontal BK Recessed	-	-	-	-
N66E0-0049	LT30 T shape acc BK Recessed	-	-	-	-
N66E0-0050	LT30 L corner acc_Vertical BK Recessed	-	-	-	-

Dimensional Drawing:

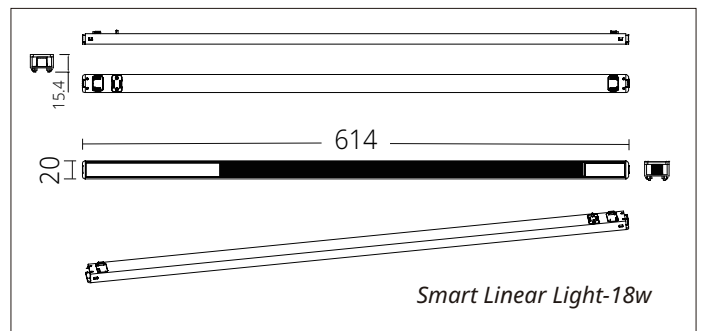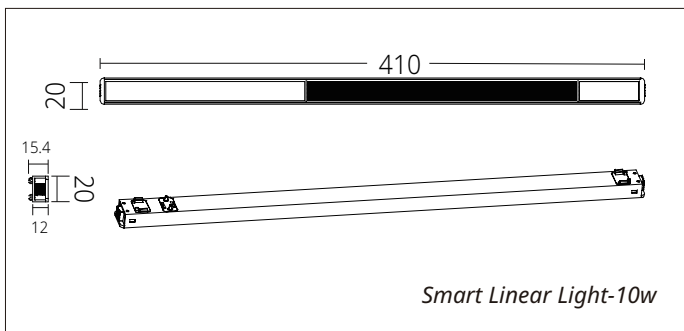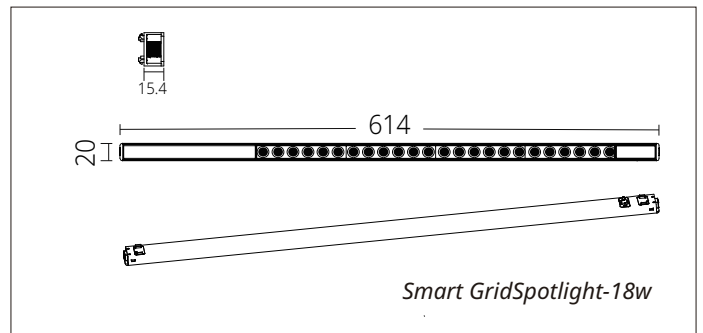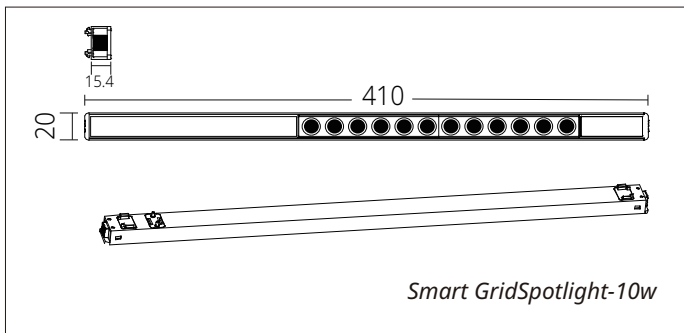

Dimensional Drawing:

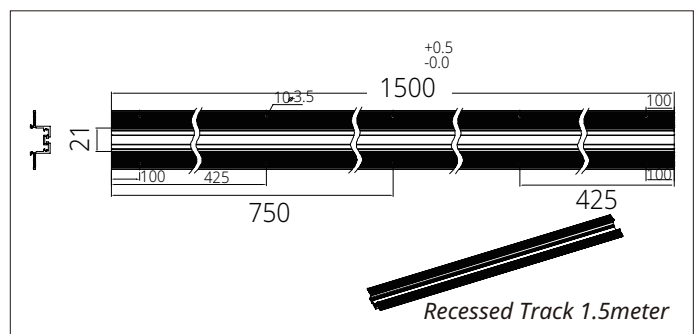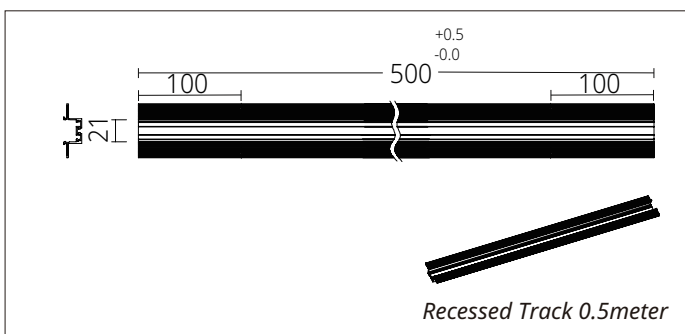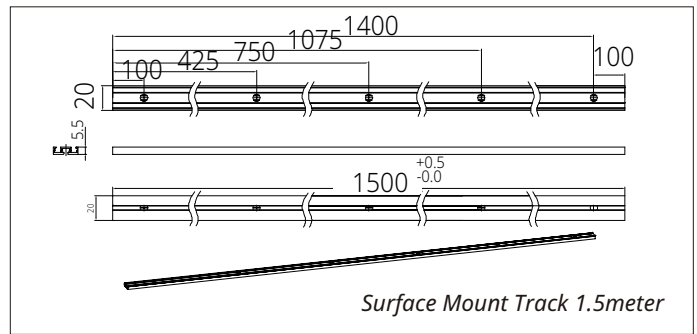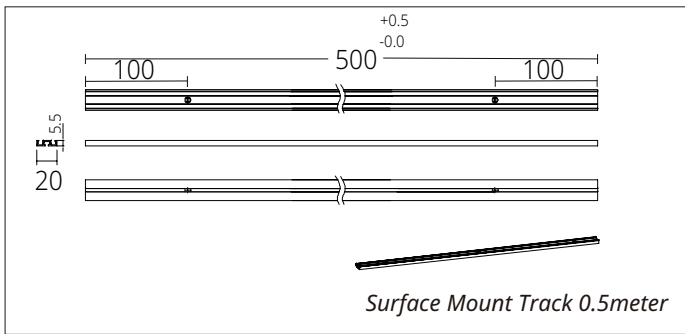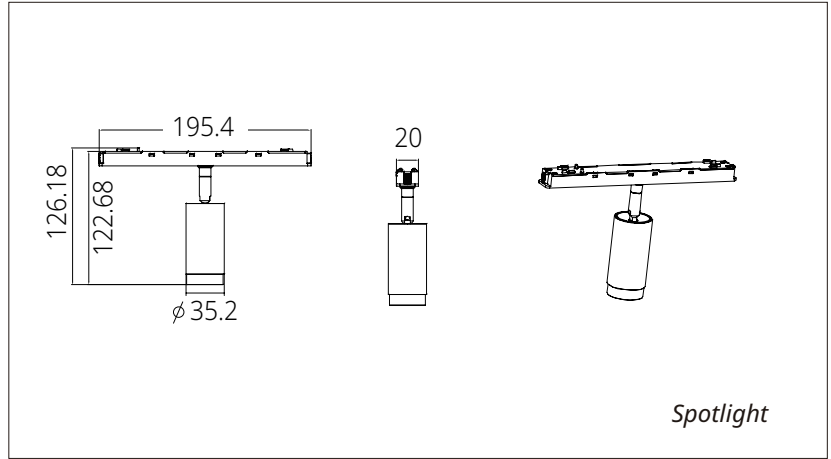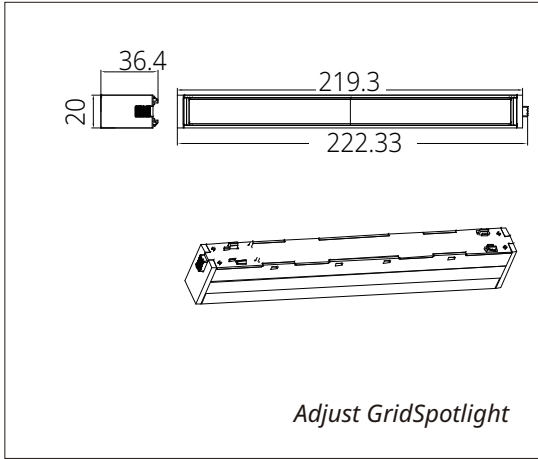



European Brand

LT30


Track Light System

Ultra Slim, Modern Aesthetics



3000K/4000K/6500K

Ultra Slim



thickness

24V

Low Voltage



*More Option
Smart (BLE) /
Traditional*



CRI ≥ 90





LT30 Track Light System

Features :

• Ultra Slim, Modern Aesthetics

The LT30 series features an ultra slim aluminum track, thickness down to 5.5mm, perfectly blending into the ceiling. Minimalism aesthetics, excellent fit for modern decoration.

• Easy Installation

The LT30 series provides both surface mounting and recessed tracks to satisfy different user preferences. Both promises effortless installation.

• Smart/Non-smart Versions Available

Smart LT30 offers more flexibility for brightness and color temperature adjustment, while the conventional non-smart version settles down to the fundamentals of lighting.

• High Color Rendering Index, Bring Comfortable Atmosphere

Our high CRI(90) can effectively present the vivid and natural color of objects, will bring a bright, wonderful, and comfortable atmosphere throughout the years of usage.

• Selected material, Long Lifetime

Applies durable material with high thermal conductivity, which effectively improves heat dissipation efficiency, and thus extends the product lifetime to 30000hrs.

Application :



Home



Public area



Commercial



Hotel

Certification :



TIS.1955-2551

Specification

DC 24V	<i>Traditional / Smart</i>	CRI 90	INSTL Recessed Surface	Finishing Black	Lifetime 30000h
-------------------	--------------------------------	-------------------	---------------------------------------	----------------------------	----------------------------

Order Code	English Description	Nominal Power	Color Temperature	Luminous Flux (lm)	Product Size (mm)
N64E0-0026	LT30 24V Track Linear Light 10W3000K BK	10W	3000K	700lm	L305*W20*H12mm
N64E0-0027	LT30 24V Track Linear Light 10W4000K BK	10W	4000K	700lm	L305*W20*H12mm
N64E0-0028	LT30 24V Track Linear Light 10W6500K BK	10W	6500K	700lm	L305*W20*H12mm
N64E0-0029	LT30 24V Track Linear Light 18W3000K BK	18W	3000K	1260lm	L508*W20*H12mm
N64E0-0030	LT30 24V Track Linear Light 18W4000K BK	18W	4000K	1260lm	L508*W20*H12mm
N64E0-0031	LT30 24V Track Linear Light 18W6500K BK	18W	6500K	1260lm	L508*W20*H12mm
N64E0-0032	LT30 24V Track GridSpotlight 10W3000K28°BK	10W	3000K	700lm	L304*W20*H12mm
N64E0-0033	LT30 24V Track GridSpotlight 10W4000K28°BK	10W	4000K	700lm	L304*W20*H12mm
N64E0-0034	LT30 24V Track GridSpotlight 10W6500K28°BK	10W	6500K	700lm	L304*W20*H12mm
N64E0-0035	LT30 24V Track GridSpotlight 18W3000K28°BK	18W	3000K	1260lm	L508*W20*H12mm
N64E0-0036	LT30 24V Track GridSpotlight 18W4000K28°BK	18W	4000K	1260lm	L508*W20*H12mm
N64E0-0037	LT30 24V Track GridSpotlight 18W6500K28°BK	18W	6500K	1260lm	L508*W20*H12mm
N64E0-0038	LT30 24V TRK Adjust GridSpotlight10W3000K28°BK	10W	3000K	700lm	L222.3*W20*H36.4mm
N64E0-0039	LT30 24V TRK Adjust GridSpotlight10W4000K28°BK	10W	4000K	700lm	L222.3*W20*H36.4mm
N64E0-0040	LT30 24V TRK Adjust GridSpotlight10W6500K28°BK	10W	6500K	700lm	L222.3*W20*H36.4mm
N64E0-0041	LT30 24V Track Spotlight 6W3000K24°BK	6W	3000K	420lm	Φ35*L195.4*H123mm
N64E0-0043	LT30 24V Track Spotlight 6W4000K24°BK	6W	4000K	420lm	Φ35*L195.4*H123mm
N64E0-0045	LT30 24V Track Spotlight 6W6500K24°BK	6W	6500K	420lm	Φ35*L195.4*H123mm
N64E0-0046	LT30 24V Track Spotlight 6W3000K36°BK	6W	3000K	420lm	Φ35*L195.4*H123mm
N64E0-0047	LT30 24V Track Spotlight 6W4000K36°BK	6W	4000K	420lm	Φ35*L195.4*H123mm
N64E0-0048	LT30 24V Track Spotlight 6W6500K36°BK	6W	6500K	420lm	Φ35*L195.4*H123mm
N65E0-0020	LT30 24V constant voltage Driver100W	100W	-	-	-
N66E0-0039	LT30 Surface Mount Track 0.5meter BK	-	-	-	-
N66E0-0040	LT30 Surface Mount Track 1.5meter BK	-	-	-	-
N66E0-0043	LT30 I shape Power connector BK Surface	-	-	-	-
N66E0-0044	LT30 L corner acc_Horizontal BK Surface	-	-	-	-
N66E0-0045	LT30 T shape acc BK Surface	-	-	-	-
N66E0-0046	LT30 L corner acc_Vertical BK Surface	-	-	-	-
N66E0-0041	LT30 Recessed Track 0.5meter BK	-	-	-	-
N66E0-0042	LT30 Recessed Track 1.5meter BK	-	-	-	-
N66E0-0047	LT30 I shape Power connector BK Recessed	-	-	-	-
N66E0-0048	LT30 L corner acc_Horizontal BK Recessed	-	-	-	-
N66E0-0049	LT30 T shape acc BK Recessed	-	-	-	-
N66E0-0050	LT30 L corner acc_Vertical BK Recessed	-	-	-	-

Dimensional Drawing:

